




SCIENTIFIC OASIS

Journal of Operations Intelligence

Journal homepage: [www.jopi-journal.org](http://www.jopi-journal.org)  
eISSN: 3009-4267

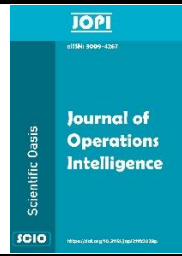

## A Framework for Assessment of Logistics Enterprises' Safety Standardization Performance Based on Prospect Theory

Cao Yushuo<sup>1</sup>, Ding Ling<sup>1,\*</sup>

<sup>1</sup> School of Economics and Management, Anhui Normal University, Wuhu, 241002, Anhui, China

### ARTICLE INFO

#### Article history:

Received 27 December 2023

Received in revised form 29 January 2024

Accepted 10 February 2024

Available online 14 February 2024

#### Keywords:

Safety standardization; Logistics enterprise;  
Performance evaluation; Prospect theory;  
Choquet integral.

### ABSTRACT

To evaluate the performance of the logistics safety standard system, we propose an evaluation framework based on performance evaluation theory. First, we construct the performance evaluation indicators of the safety standard system for logistics enterprises. These are based on existing performance evaluation indicators and combined with the construction goals of the logistics safety standard system. Second, we combine the triangular fuzzy number and prospect theory to determine the indicator states according to the characteristics of performance evaluation indicators. Then, we use the Choquet integral, fuzzy method, and Shapley value methods to evaluate the information, considering the interaction of indicators. Third, we use entropy and the fuzzy analytic hierarchy process to determine the expert weights. The performance evaluation information of the logistics enterprise's safety standard system is aggregated to obtain the assessment results. Finally, the proposed framework is validated by example analysis. The results show that the proposed framework can be used to evaluate the performance of logistics enterprise safety standard systems.

### 1. Introduction

With the rapid development of e-commerce and cross-border e-commerce, the logistics industry is vital in connecting the online market and real consumers. However, many logistics safety events occurred, which poses a challenge to the safety of logistics enterprise production [1, 2]. China's State Administration of Work Safety formulated the "Evaluation Standard of Warehouse Logistics Enterprise Safety Production Standardization" in 2011. It aims to promote the standardization and institutionalization of safe operation in the production process of warehouse logistics enterprises. It also aims to reduce operational safety accidents, the possibility of casualties, environmental pollution, property loss, and other consequences. It improves the safety management level of warehouse logistics enterprises. However, safety production accidents in the logistics industry occur frequently [3]. The efficiency of the construction of the safety standard system of logistics enterprises

\* Corresponding author.

E-mail address: [dinglingcnu@163.com](mailto:dinglingcnu@163.com)

<https://doi.org/10.31181/jopi21202418>

© The Author(s) 2024 | [Creative Commons Attribution 4.0 International License](https://creativecommons.org/licenses/by/4.0/)

has attracted a lot of attention [4]. By evaluating the performance of the safety standard system of logistics enterprises, we can comprehensively judge the construction level, implementation process, and effect of the safety standard system. Further, we can also provide advice for rectifying, improving, and implementing the safety standard system of logistics enterprises.

Many safety management systems exist, such as Health, Safety, and Environment, DuPont safety management systems, Occupational Health and Safety (OHS) management systems, and safety production standard systems [5-7]. They are widely used in enterprises. However, there are still various accidents. Therefore, how to effectively evaluate and regulate the implementation effect of these safety management systems has attracted the attention of researchers and enterprises [8]. Many scholars have actively explored the performance evaluation of safety management systems and produced valuable research results. Some scholars have used different methods to comprehensively select the performance evaluation indicators for safety management systems. For example, Spyropoulos *et al.*, [6] introduced a new hybrid indicator for monitoring and evaluating the occupational health and well-being of the rail sector's workforce. Singh and Misra, [9] developed a decision-making method and identified the critical indicators for assessing the safety performance of the workforce in the Indian construction industry. Ortiz-Barrios *et al.*, [10] used the multi-criteria decision-making (MCDM) method and identified critical indicators for evaluating OHS performance in the context of the aging workforce. Frankish *et al.*, [11] identified the essential indicators under four main aspects to evaluate the performance of safety management systems in the food field. Golabchi *et al.*, [12] reviewed and identified the leading indicators for safety management in the construction field and assessed the effectiveness of their implementation on construction projects. Yuan *et al.*, [13] presented a helpful classification method for safety barriers, which can effectively identify the performance indicators and collect the indicator-related data. Hayes *et al.*, [14] examined the importance of safety performance indicators in evaluating safety management. Hammond *et al.*, [15] studied the relationship between safety performance indicators and safety culture, taking nuclear waste cleanup operations in the U.S. as an example. Based on the performance indicator system established, some scholars utilized many methods to evaluate the performance of the safety management system. Such as the analytic hierarchy process [16, 17], DEA method [18, 19], fuzzy methods [20, 21], comprehensive evaluation combination method [22], and so on. In addition, some scholars constructed the performance evaluation indicator system for the specific implementation objects of the safety management system. Tonka and Ekmekci, [17] utilized a two-stage MCDM model to create the performance evaluation indicator of OHS in the geothermal energy field. Phinias, [7] identified the challenges and benefits of implementing leading indicators for health and safe management in construction through a systematic review. Jahanvand *et al.*, [19] proposed a mixed method to determine the essential indicator for selecting risk evaluation techniques in OHS management. Riascos *et al.*, [23] identified indicators for assessing OHS performance, including 126 specific indicators under four areas. Küçükarslan *et al.*, [24] proposed a MCDM model under four main indicators and seventeen sub-indicators for assessing OHS performance in forest fire management.

The above research results provide a theoretical basis and practical guidance for the performance evaluation of safety standard systems. However, the existing performance evaluation of safety standard systems is still insufficient to solve some problems. Firstly, determining indicator weight is usually based on the assumption that the indicators are independent in the evaluation process. Secondly, experts often have bounded behavior when evaluating results, such as reference dependence, loss aversion, and diminishing sensitivity. These bounded behaviors will affect the objectivity of the evaluation results, so they should be considered in the performance evaluation of

the safety standard system of logistics enterprises. The prospect theory considers the irrational behavior of experts in uncertain and risky environments during the evaluation process, which can more accurately describe the decision-making behavior characteristics of experts [25]. At present, the prospect theory has been applied to many fields, such as risk assessment [26], failure analysis [27], emergency plan selection [28], and so on.

In summary, to evaluate the implementation effect of the logistics safety standard system, this paper proposes a performance evaluation method for logistics enterprise safety standardization, which considers the correlation of performance indicators. The rest of the study is as follows. Firstly, according to the construction goal of logistics safety standardization, we establish a performance evaluation indicator system of logistics safety standardization in section 2. Secondly, the Choquet integral and prospect theory methods are used to establish the performance evaluation model of logistics enterprise safety standardization in section 3. It considers the interaction of indicators and the psychological behavior of experts. Next, an example is provided to examine the established method's effectiveness in section 4. Finally, section 5 gives the conclusion.

## 2. Construction of performance evaluation indicator of logistics enterprise safety standard system

### 2.1 Evaluation indicator

The performance evaluation indicator should reflect the current situation of logistics enterprises' safety standard systems and provide advice for managing and improving the effect of safety standard system construction. Therefore, the performance evaluation indicator of the safety standard system for logistics enterprises is identified from the four dimensions of the input-output perspective. It includes personal safety, process safety, standard systems, and occupational health. It is based on the existing research for performance evaluation indicators of safety management systems and combined with the "Evaluation Standard of Warehouse Logistics Enterprise Safety Production Standardization." Then, the performance evaluation indicators of the safety standard system for logistics enterprises are constructed and shown in Figure 1.

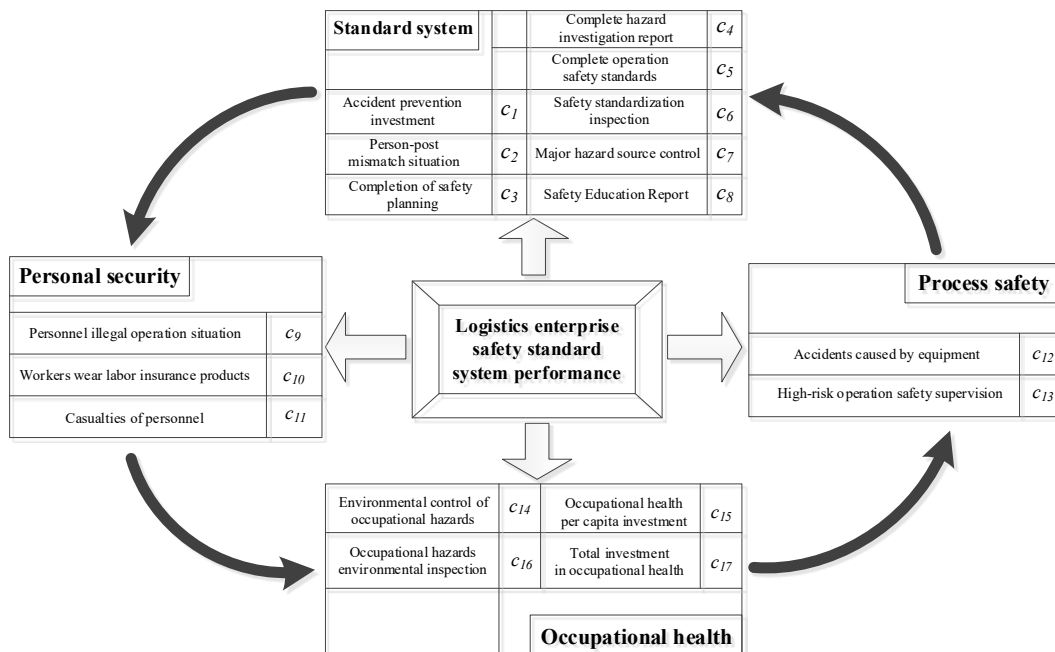


Fig. 1. Performance evaluation indicators of safety standard system for logistics enterprises.

According to Fig.1, the indicator system mainly analyzes the performance factors from the perspective of input and output in the construction process of the logistics enterprise safety standard system. Experts' performance evaluation of the safety standard system of logistics enterprises mainly evaluates the status of the performance factors involved. However, the performance evaluation indicator constructed lacks a unified evaluation standard, and it is impossible to determine the state of each performance factor by the accurate digital scoring method. Therefore, this paper organizes experts to use the linguistic terms set shown in Table 1 to evaluate.

**Table 1**  
 Linguistic terms set of evaluation [29]

Real numbers	Linguistic terms	Triangular fuzzy number
5	Very good	(0.75,1.00,1.00 )
4	Good	(0.50,0.75,1.00)
3	Slight good	(0.25,0.50,0.75 )
2	Bad	(0.00,0.25,0.50 )
1	Very bad	(0.00,0.00,0.25 )

### 3. Performance evaluation model based on prospect theory

To intuitively describe the performance evaluation of the safety standard system for logistics enterprises, we use the following symbols to represent the model variables and sets involved in the performance evaluation process.

①  $L = \{l_1, l_2, l_3, \dots, l_m\}$  : There are  $m$  logistics enterprises to be evaluated; where  $l_i$  is the  $i$  th logistics enterprise and  $i = 1, 2, 3 \dots m$  .

②  $P = \{p_1, p_2, p_3, \dots, p_t\}$  : There are  $t$  experts; where  $p_k$  is the  $k$  th experts and  $k = 1, 2, 3 \dots t$  .

③  $\lambda = \{\lambda_1, \lambda_2, \lambda_3 \dots \lambda_t\}$  : It is the weight vector of experts; where  $\lambda_k$  represents the weight of the  $k$  th experts,  $0 \leq \lambda_k \leq 1$ , and  $\sum_{k=1}^t \lambda_k = 1$  .

④  $C = \{c_1, c_2, c_3, \dots, c_n\}$  : There are  $n$  indicator, where  $c_j$  is the  $j$  th criteria of the performance evaluation and  $j = 1, 2, 3 \dots n$  .

⑤  $X = (\tilde{X}^k), \tilde{X}^k = (x_{ij}^k)_{m \times n}, k = 1, 2, \dots, t$  : It is the evaluation value corresponding to the performance evaluation indicator.  $\tilde{X}^k$  is the evaluation value given by the  $k$  th expert, and  $x_{ij}^k$  is the evaluation value of the  $i$  th expert on the  $i$  th logistics enterprise to be evaluated under the  $j$  th performance indicator.

#### 3.1 Prospect value calculation

The performance evaluation of the safety standard system for logistics enterprises refers to the judgment of the actual situation of  $m$  enterprises under  $n$  evaluation indicators by  $t$  experts. The evaluation result vector of the  $k$  th expert on the  $i$  th logistics enterprise can be expressed as  $V_i^k = (x_{ij}^k), j = 1, 2, \dots, n$  . We use the prospect theory to aggregate the performance evaluation results and the Choquet integral method to aggregate the comprehensive prospect value of the performance evaluation indicator. Then, the performance evaluation results of the safety standard system for each logistics enterprise are determined. The prospect theory mainly analyzes the decision-making problem based on the two dimensions of gain and loss. The income and loss are determined based on the selected reference point. Then, according to the theory of the TOPSIS

(Technique for Order of Preference by Similarity to Ideal Solution) method, the highest  $x^+$  and lowest performance levels  $x^-$  are taken as reference points.

From the above analysis, combined with the TOPSIS theory, the distance between the evaluation value of each performance indicator and the reference point can be obtained as follows:

$$\mu_{ij}^{k(*)} = d(x_{ij}^k, x_j^+) \tag{1}$$

$$\mu_{ij}^{k(0)} = d(x_{ij}^k, x_j^-)$$

where  $\mu_{ij}^{k(*)}$  and  $\mu_{ij}^{k(0)}$  are the distance between the evaluation value and the performance level reference value of the  $k$  th expert on the  $i$  th logistics enterprise under the  $j$  th indicator.

Then, combined with the prospect theory [26], the prospect value is calculated as follows:

$$v_{ij}^{k(+)} = \begin{cases} (\mu_{ij}^{k(*)})^\alpha & x_{ij}^k \geq x_j^+ \\ (1 - \mu_{ij}^{k(0)})^\alpha & x_{ij}^k \geq x_j^- \end{cases} \tag{2}$$

$$v_{ij}^{k(-)} = \begin{cases} -\theta[-(\mu_{ij}^{k(*)} - 1)]^\beta & x_{ij}^k < x_j^+ \\ -\theta(-\mu_{ij}^{k(0)})^\beta & x_{ij}^k < x_j^- \end{cases} \tag{3}$$

where  $\alpha, \beta$  represent the convexity of the power function of the gain and loss value of the performance evaluation indicator, respectively. Additionally, the value reflects the psychological behavior characteristics of the experts on the change of the sensitivity of the gain and loss.  $\theta > 1$  is used to describe the psychological and behavioral characteristics of loss aversion of experts in the evaluation process. The larger the  $\theta$  value is, the higher the degree of loss aversion of experts, where  $i = 1, 2, 3 \dots m$ ,  $j = 1, 2, 3 \dots n$ , and  $k = 1, 2, 3 \dots t$ , respectively.

Assume that the expert faces two cases of gain and loss,  $\pi_j^{k(+)}$  and  $\pi_j^{k(-)}$  are subjective probability weighting functions, respectively. Then, the complex prospect value of the  $k$  th expert is calculated as follows:

$$v_{ij}^k = v_{ij}^{k(+)} \pi_j^{k(+)} + v_{ij}^{k(-)} \pi_j^{k(-)} \tag{4}$$

The construction of the subjective probability weight function needs to consider the deviation of the expert's processing of probability events during evaluation. Therefore, according to the prospect theory, the expert subjective probability weighting function can be counted as follows [30]:

$$\pi_j^k = \begin{cases} \pi_j^{k(+)} = \frac{(p_j^k)^\chi}{[(p_j^k)^\chi + (1 - p_j^k)^\chi]^{1/\chi}} \\ \pi_j^{k(-)} = \frac{(p_j^k)^\delta}{[(p_j^k)^\delta + (1 - p_j^k)^\delta]^{1/\delta}} \end{cases} \tag{5}$$

where  $\chi$  and  $\delta$  represent the curvature degree of the subjective probability function when the expert faces two situations of gain and loss,  $j = 1, 2, 3 \dots n$ , and  $k = 1, 2, 3 \dots t$ . Here, we set  $\alpha = \beta = 0.88$ ,  $\theta = 2.25$ ,  $\chi = 0.61$ ,  $\delta = 0.69$  according to Gao *et al.*, [30].

Finally, the comprehensive prospect matrix of the  $k$  th expert can be obtained as follows:

$$V^k = \begin{bmatrix} v_{11}^k & v_{12}^k & \dots & v_{1n}^k \\ v_{21}^k & v_{22}^k & \dots & v_{2n}^k \\ \vdots & \vdots & & \vdots \\ v_{m1}^k & v_{m2}^k & \dots & v_{mn}^k \end{bmatrix} \tag{6}$$

### 3.2 The aggregation of performance evaluation information based on the Choquet integral method

Most of the current indicator aggregation methods assume that the indicators are independent. However, indicators interact in the performance evaluation of the logistics enterprise safety standard system. Based on the fuzzy measure theory, the Choquet integral and Shapley value coupling method can better solve the indicators' correlation [31]. Therefore, we use the integrated method combined with the Choquet integral, fuzzy measure, and Shapley value to aggregate the comprehensive prospect matrix of each evaluation expert. The specific calculation process is as follows.

① Definition of fuzzy measure concept

The power set of indicators  $C^k = \{c_1^k, c_2^k, \dots, c_n^k\}$  with the expert  $t_k$  needs to evaluate is  $P(C^k)$ . Then, let  $\mu: P(C^k) \rightarrow [0,1]$  be the set function of  $P(C^k)$ . If the set function satisfies the following conditions simultaneously, the set function  $\mu$  is defined as a fuzzy measure.

①  $\mu(\emptyset) = 0, \mu(C^k) = 1$ ; ②  $A, B \in P(C^k), A \subseteq B$ , then  $\mu(A) \leq \mu(B)$ .

Based on satisfying the above conditions, if the set function  $\mu$  satisfies the following formula, the set function is defined as  $\lambda$  fuzzy measure.

$$\mu(A \cup B) = \mu(A) + \mu(B) + \lambda \mu(A)\mu(B), \lambda \in (-1, \infty) \tag{7}$$

② The  $\lambda$  fuzzy measure of the indicator set

For each subset  $A \subseteq C^k$  of the evaluation indicator set  $C^k = \{c_1^k, c_2^k, \dots, c_n^k\}$ , then the  $\lambda$  fuzzy measure  $\mu(A)$  can use the following Eq. (8) to calculate [32]:

$$\mu(A) = \begin{cases} \frac{1}{\lambda} (\prod_{j \in A} [1 + \lambda \mu(c_j^k)] - 1) & \lambda \neq 0 \\ \sum_{j \in A} \mu(c_j^k) & \lambda = 0 \end{cases} \tag{8}$$

Then, according to  $\mu(C^k) = 1$ , Eq. (8) can be expressed an equality of parameter  $\lambda$ , which is as follows:

$$\lambda + 1 = \prod_{j=1}^n (1 + \lambda \mu(c_j^k)) \tag{9}$$

③ Shapley value calculation

As  $\forall A \in P(C^k)$ , the extended Shapley value can be denoted as [32]:

$$\Phi(A) = \sum_{B \subseteq C^k / A} \frac{(|C^k| - |A| - |B|)! |B|!}{(|C^k| - |A| + 1)!} \cdot (\mu(A \cup B) - \mu(B)) \tag{10}$$

Further, when  $A = c_j^k$ , the Shapley value in Eq. (10) will become the formula in Eq. (11).

$$\Phi(c_j^k) = \sum_{B \subseteq C^k / c_j^k} \frac{(|C^k| - 1 - |B|)! |B|!}{(|C^k|)!} \cdot (\mu(c_j^k \cup B) - \mu(B)) \tag{11}$$

where  $|C^k|, |A|, |B|$  are the potential indicators of their corresponding sets, respectively.  $\Phi(A)$  refers to the correlation between set A and other indicator set B. It can express the contribution of performance indicator set A in the whole performance evaluation indicator set. Moreover,  $\Phi(c_j^k)$  refers to the contribution of performance evaluation indicator  $c_j^k$  in all performance evaluation indicators so that it can be the weight of  $c_j^k$ .

④ Comprehensive prospect value aggregation based on the Choquet integral method, fuzzy measure, and Shapley value. To fully consider the relationship between the indicator and the weight

of each indicator, the  $\lambda$ -fuzzy measure and Shapley value are combined to form the  $\lambda$ -Shapley value, which is shown in Eq. (12).

$$\Phi(c_j^k) = \sum_{B \subseteq C^k / c_j^k} \frac{(|C^k| - 1 - |B|)! |B|!}{(|C^k|)!} \cdot \mu(c_j^k) \prod_{j=1}^n [1 + \lambda \mu(c_j^k)] \quad (12)$$

According to Eq. (12) and combined with the Choquet integral method, the  $\lambda$ -Shapley Choquet integral is as follows:

$$C_{\Phi(c_j^k)}(v_{i(1)}^k, v_{i(2)}^k, \dots, v_{i(n)}^k) = \sum_{i=1}^n v_{i(j)}^k [\Phi_{A(i)}(c_j^k) - \Phi_{A(i+1)}(c_j^k)] \quad (13)$$

In summary, the comprehensive prospect value  $V^k$  of each expert is aggregated by the correlation aggregation operator of the performance evaluation indicator combined with the Choquet integral method,  $\lambda$  fuzzy measure, and Shapley value, which is shown as follows:

$$V = (v_i^k)_{m \times t} = \begin{bmatrix} v_1^1 & v_1^2 & \dots & v_1^t \\ v_2^1 & v_2^2 & \dots & v_2^t \\ \vdots & \vdots & & \vdots \\ v_m^1 & v_m^2 & \dots & v_m^t \end{bmatrix} \quad (14)$$

### 3.3 Expert weight determination and performance evaluation information aggregation

It is necessary to calculate the expert weight to determine the final performance situation of each logistics enterprise. At present, the methods of expert weight calculation include the subjective weighting method, objective weighting method, and subjective and objective integrated weighting method [33, 34]. The subjective and objective integrated weighting method is widely used in expert weight calculation, which can effectively combine the advantages of the single weighting method and avoid its shortcomings [34]. The knowledge level, the preference characteristic of experts, and the amount of decision-making judgment information will impact the performance evaluation results. This paper uses the fuzzy analytic hierarchy process (FAHP) to calculate the weight of experts, which considers these issues [35]. In addition, the entropy method is used to measure the amount of information for experts during evaluation. The specific calculation process is as follows.

#### ① Determination of expert weight based on the FAHP method

Firstly, according to the experts' industry background and participation in the safety system evaluation, the Delphi method is used to judge the importance of the prior information of each expert relative to the performance evaluation. Then, according to Ben Rabia and Bellabdaoui, [35], we calculate the expert weight  $\{\lambda_1^1, \lambda_2^1, \dots, \lambda_t^1\}$  based on the FAHP method.

#### ② Determination of expert weight based on entropy method

The entropy method effectively describes the importance of experts in the decision-making process. We use the entropy method to calculate the expert weight. The entropy value and weight of the evaluation experts can be obtained by the entropy method, as shown in Eqs. (15-17).

$$e_k = -K \sum_{i=1}^m v_i^k \ln v_i^k \quad (15)$$

$$d_k = 1 - e_k \quad (16)$$

$$\lambda_k^2 = \frac{d_k}{\sum_{k=1}^t d_k} \quad (17)$$

#### ③ Expert weight determination

The comprehensive weight of experts is as follows.

$$\lambda_k = \vartheta_1 \lambda_k^1 + \vartheta_2 \lambda_k^2 \tag{18}$$

where  $\vartheta_1$  and  $\vartheta_2$  are the relative degrees of the two methods, respectively.

Finally, the comprehensive prospect value of the performance of the safety standard system of logistics enterprises is as follows.

$$v_i = \sum_{k=1}^t \lambda_k v_i^k \tag{19}$$

#### 4. Case study

To illustrate the effectiveness of the proposed framework, a food logistics enterprise in Anhui Province is taken as an example to evaluate the performance of its safety standard system. The food logistics enterprise comprises three links: packing, transportation, and storage. The three links have carried out the construction project of a logistics safety standard system. Therefore, this paper takes three links  $\{l_1, l_2, l_3\}$  as the evaluation objects and uses the proposed method to evaluate the performance of their safety standard system. We invite three relevant experts  $\{p_1, p_2, p_3\}$  to assess the performance of the safety standard system for the three logistics links. Based on the company's actual situation and experts' professional knowledge, the performance of the safety standard system for the three logistics links is evaluated. Then, according to Antão *et al.*, [36], we use the statistical frequency of performance evaluation indicators in existing research as the probability value  $p_j^k$  of performance indicators. Here, we take the first expert as an example, as shown in Table 2, where  $i = 1, 2, 3, k = 1, 2, 3$ , and  $j = 1, 2, 3, \dots, 17$ , respectively.

**Table 2**  
 The performance valuation value from expert  $p_1$

Indicator	Probability	$l_1$	$l_2$	$l_3$
$c_1$	0.047	(0.25,0.50,0.75)	(0.25,0.50,0.75)	(0.00,0.25,0.50)
$c_2$	0.012	(0.00,0.25,0.50)	(0.25,0.50,0.75)	(0.00,0.00,0.25)
$c_3$	0.188	(0.50,0.75,1.00)	(0.00,0.25,0.50)	(0.25,0.50,0.75)
$c_4$	0.035	(0.00,0.25,0.50)	(0.25,0.50,0.75)	(0.00,0.25,0.50)
$c_5$	0.047	(0.25,0.50,0.75)	(0.25,0.50,0.75)	(0.50,0.75,1.00)
$c_6$	0.024	(0.00,0.00,0.25)	(0.25,0.50,0.75)	(0.00,0.00,0.25)
$c_7$	0.035	(0.50,0.75,1.00)	(0.50,0.75,1.00)	(0.75,1.00,1.00)
$c_8$	0.071	(0.00,0.00,0.25)	(0.25,0.50,0.75)	(0.50,0.75,1.00)
$c_9$	0.047	(0.00,0.00,0.25)	(0.00,0.25,0.50)	(0.00,0.25,0.50)
$c_{10}$	0.024	(0.00,0.00,0.25)	(0.00,0.25,0.50)	(0.00,0.25,0.50)
$c_{11}$	0.176	(0.50,0.75,1.00)	(0.75,1.00,1.00)	(0.50,0.75,1.00)
$c_{12}$	0.035	(0.50,0.75,1.00)	(0.50,0.75,1.00)	(0.75,1.00,1.00)
$c_{13}$	0.141	(0.00,0.00,0.25)	(0.25,0.50,0.75)	(0.00,0.00,0.25)
$c_{14}$	0.012	(0.50,0.75,1.00)	(0.75,1.00,1.00)	(0.50,0.75,1.00)
$c_{15}$	0.035	(0.50,0.75,1.00)	(0.50,0.75,1.00)	(0.50,0.75,1.00)
$c_{16}$	0.047	(0.00,0.00,0.25)	(0.25,0.50,0.75)	(0.00,0.00,0.25)
$c_{17}$	0.024	(0.75,1.00,1.00)	(0.50,0.75,1.00)	(0.50,0.75,1.00)

Then, using Eqs. (1-3) to calculate the prospect values of each performance evaluation indicator, as shown in Table 3. Next, using Eq. (6), we calculate the comprehensive performance prospect values of the three links under each indicator given by the expert  $p_1$ , and the results are shown in Table 4. Similarly, we count the comprehensive prospect value of each indicator of the performance evaluation value given by the expert  $p_2$  and the expert  $p_3$ , as shown in Table 5 and Table 6.

**Table 3**  
 The positive and negative prospect value from expert  $p_1$

Indicator	$l_1$		$l_2$		$l_3$	
	Positive value	Negative value	Positive value	Negative value	Positive value	Negative value
$c_1$	0.073	-0.139	0.099	-0.139	0.102	-0.080
$c_2$	0.048	-0.033	0.047	-0.057	0.061	-0.010
$c_3$	0.084	-0.444	0.253	-0.185	0.145	-0.320
$c_4$	0.087	-0.067	0.085	-0.116	0.087	-0.067
$c_5$	0.073	-0.139	0.099	-0.139	0.042	-0.192
$c_6$	0.089	-0.016	0.069	-0.089	0.089	-0.016
$c_7$	0.036	-0.161	0.060	-0.161	0.011	0.000
$c_8$	0.157	-0.032	0.122	-0.178	0.052	-0.247
$c_9$	0.128	-0.025	0.128	-0.080	0.102	-0.080
$c_{10}$	0.089	-0.016	0.089	-0.052	0.071	-0.052
$c_{11}$	0.081	-0.428	0.081	0.000	0.081	-0.428
$c_{12}$	0.036	-0.161	0.060	-0.161	0.011	0.000
$c_{13}$	0.220	-0.049	0.171	-0.270	0.220	-0.049
$c_{14}$	0.020	-0.079	0.020	0.000	0.020	-0.079
$c_{15}$	0.036	-0.161	0.060	-0.161	0.036	-0.161
$c_{16}$	0.128	-0.025	0.099	-0.139	0.128	-0.025
$c_{17}$	0.009	0.000	0.048	-0.124	0.029	-0.124

**Table 4**  
 Comprehensive prospect value under each indicator from expert  $p_1$

$l_1$				$l_2$			
Indicator	Prospect values	Indicator	Prospect values	Indicator	Prospect values	Indicator	Prospect values
$c_1$	-0.065	$c_{10}$	0.072	$c_1$	-0.040	$c_{10}$	0.037
$c_2$	0.015	$c_{11}$	-0.346	$c_2$	-0.010	$c_{11}$	0.081
$c_3$	-0.360	$c_{12}$	-0.124	$c_3$	0.068	$c_{12}$	-0.101
$c_4$	0.021	$c_{13}$	0.172	$c_4$	-0.030	$c_{13}$	-0.099
$c_5$	-0.065	$c_{14}$	-0.059	$c_5$	-0.040	$c_{14}$	0.020
$c_6$	0.072	$c_{15}$	-0.124	$c_6$	-0.021	$c_{15}$	-0.101
$c_7$	-0.124	$c_{16}$	0.103	$c_7$	-0.101	$c_{16}$	-0.040
$c_8$	0.125	$c_{17}$	0.009	$c_8$	-0.056	$c_{17}$	-0.076
$c_9$	0.103			$c_9$	0.047		

$l_3$			
Indicator	Prospect values	Indicator	Prospect values
$c_1$	0.021	$c_{10}$	0.019
$c_2$	0.050	$c_{11}$	-0.346
$c_3$	-0.175	$c_{12}$	0.011
$c_4$	0.021	$c_{13}$	0.172
$c_5$	-0.150	$c_{14}$	-0.059
$c_6$	0.072	$c_{15}$	-0.124
$c_7$	0.011	$c_{16}$	0.103
$c_8$	-0.195	$c_{17}$	-0.095
$c_9$	0.021		

**Table 5**  
 Comprehensive prospect value under each indicator from expert  $p_2$

$l_1$				$l_2$			
Indicator	Prospect values	Indicator	Prospect values	Indicator	Prospect values	Indicator	Prospect values
$c_1$	-0.034	$c_{10}$	0.068	$c_1$	-0.038	$c_{10}$	0.039
$c_2$	0.035	$c_{11}$	-0.374	$c_2$	-0.013	$c_{11}$	0.076
$c_3$	-0.287	$c_{12}$	-0.125	$c_3$	0.063	$c_{12}$	-0.107
$c_4$	0.029	$c_{13}$	0.175	$c_4$	-0.028	$c_{13}$	-0.093
$c_5$	-0.056	$c_{14}$	-0.057	$c_5$	-0.036	$c_{14}$	0.024
$c_6$	0.083	$c_{15}$	-0.118	$c_6$	-0.024	$c_{15}$	-0.105
$c_7$	-0.131	$c_{16}$	0.108	$c_7$	-0.106	$c_{16}$	-0.042
$c_8$	0.129	$c_{17}$	0.006	$c_8$	-0.057	$c_{17}$	-0.073
$c_9$	0.107			$c_9$	0.043		

$l_3$			
Indicator	Prospect values	Indicator	Prospect values
$c_1$	0.019	$c_{10}$	0.023
$c_2$	0.053	$c_{11}$	-0.338
$c_3$	-0.173	$c_{12}$	0.019
$c_4$	0.021	$c_{13}$	0.178
$c_5$	-0.148	$c_{14}$	-0.052
$c_6$	0.067	$c_{15}$	-0.127
$c_7$	0.016	$c_{16}$	0.106
$c_8$	-0.121	$c_{17}$	-0.091
$c_9$	0.035		

**Table 6**  
 Comprehensive prospect value under each indicator from expert  $p_3$

$l_1$				$l_2$			
Indicator	Prospect values	Indicator	Prospect values	Indicator	Prospect values	Indicator	Prospect values
$c_1$	-0.056	$c_{10}$	0.083	$c_1$	-0.043	$c_{10}$	0.041
$c_2$	0.019	$c_{11}$	-0.339	$c_2$	-0.016	$c_{11}$	0.079
$c_3$	-0.353	$c_{12}$	-0.128	$c_3$	0.072	$c_{12}$	-0.098
$c_4$	0.026	$c_{13}$	0.176	$c_4$	-0.036	$c_{13}$	-0.102
$c_5$	-0.058	$c_{14}$	-0.053	$c_5$	-0.043	$c_{14}$	0.017
$c_6$	0.076	$c_{15}$	-0.129	$c_6$	-0.027	$c_{15}$	-0.106
$c_7$	-0.126	$c_{16}$	0.108	$c_7$	-0.106	$c_{16}$	-0.038
$c_8$	0.128	$c_{17}$	0.003	$c_8$	-0.053	$c_{17}$	-0.065
$c_9$	0.098			$c_9$	0.051		

$l_3$			
Indicator	Prospect values	Indicator	Prospect values
$c_1$	0.023	$c_{10}$	0.015
$c_2$	0.046	$c_{11}$	-0.349
$c_3$	-0.171	$c_{12}$	0.016
$c_4$	0.025	$c_{13}$	0.175
$c_5$	-0.143	$c_{14}$	-0.063
$c_6$	0.076	$c_{15}$	-0.127
$c_7$	0.015	$c_{16}$	0.106
$c_8$	-0.197	$c_{17}$	-0.094
$c_9$	0.018		

After that, experts are invited to give the fuzzy measure value of the performance evaluation indicator and use the MATLAB software to solve the value  $\lambda$ . The calculation result is  $\lambda^t = \{0.719, 0.696, 0.787\}$ . According to Eqs. (9-12), we calculate the extended Shapley value based on the  $\lambda$ -Shapley Choquet interval method. Due to space limitations, only part of the results are shown in Table 7. According to Tables 4 to 7 and Eq. (13), we can obtain the comprehensive prospective value of performance evaluation of the standard system, as shown in Table 8.

**Table 7**  
 The extended Shapley values under each indicator from 3 experts

	$\Phi(c_1)$	$\Phi(c_2)$	$\Phi(c_2)$	$\Phi(c_2)$	$\Phi(c_2)$	$\Phi(c_2)$	$\Phi(c_2)$	$\Phi(c_2)$	$\Phi(c_2)$
P1	0.31	0.23	0.18	0.26	0.29	0.17	0.27	0.19	0.12
P2	0.28	0.19	0.24	0.28	0.26	0.08	0.26	0.17	0.09
P3	0.29	0.25	0.17	0.31	0.25	0.13	0.21	0.12	0.15
	$\Phi(c_2)$	$\Phi(c_2)$	$\Phi(c_2)$	$\Phi(c_2)$	$\Phi(c_2)$	$\Phi(c_2)$	$\Phi(c_2)$	$\Phi(c_2)$	$\Phi(c_2)$
P1	0.28	0.23	0.09	0.21	0.25	0.11	0.15	0.23	
P2	0.21	0.25	0.12	0.18	0.23	0.18	0.19	0.18	
P3	0.27	0.19	0.15	0.17	0.19	0.13	0.16	0.21	

**Table 8**  
 The final prospect values of three logistics links

	P1	P2	P3
$l_1$	-0.285	-0.487	-0.238
$l_2$	-0.294	-0.502	-0.256
$l_3$	-0.256	-0.479	-0.237

The calculation of expert weight is divided into two parts. Firstly, the calculation weight of experts using the FAHP method is  $\lambda^1 = \{0.371, 0.285, 0.344\}$ . Secondly, the calculation weight of experts using the entropy method is  $\lambda^2 = \{0.333, 0.334, 0.333\}$ . According to Eq. (18-19), the evaluation results of safety performance for the three links are as follows:  $l_i = \{-0.278, -0.489, -0.243\}$ . According to the evaluation results, the three links of the logistics enterprise which have the best performance in the safety standard system are link  $l_3$ . The logistics enterprise involved in this paper are mainly engaged in food warehousing and food logistics distribution business. Therefore, according to the "Evaluation Standard of Warehouse Logistics Enterprise Safety Production Standardization" and the existing performance evaluation indicator of the safety management system, the evaluation indicator system is established. Then, the evaluation information is obtained through the expert evaluation method. Finally, the best performance of the safety standard system in the logistics links of the enterprise is  $l_3$ .

## 5. Conclusions

Logistics safety standardization is a crucial way to improve the safety management level of logistics enterprises. The performance evaluation of safety standardization can provide advice reference for enterprises and relevant departments to promote the construction of safety standardization. This paper proposes a performance evaluation framework based on the  $\lambda$ -Shapley Choquet integral method and prospect theory. It considers the characteristic attributes of indicator correlation and uncertainty of safety standardization during performance evaluation for logistics

enterprises. An example analysis verifies the practicability of this framework, and the conclusions are as follows.

(1) The triangular fuzzy number and prospect theory are used to process information. It can not only describe the uncertainty in the process of expert evaluation but also effectively simulate psychological behavior, such as the subjective preference of experts.

(2) Using the  $\lambda$ -Shapley Choquet integral to aggregate evaluation information of experts can effectively consider the indicator correlation in the performance evaluation of the logistics safety standard system. Further, we propose an approach to calculate the expert weight based on the entropy and FAHP method. It considers the influence of evaluation experts' bounded behavior and makes the evaluation results conform to reality.

In future research on the performance evaluation of safety standardization for logistics enterprises, researchers could consider applying the proposed performance evaluation method to other industries. Meanwhile, researchers could focus on constructing an evaluation method for safety standardization under the objective and subjective data-integrated environment.

### **Author Contributions**

Conceptualization, Y.C.; methodology, Y.C.; software, Y.C.; validation, Y.C.; formal analysis, L.D.; investigation, L.D.; resources, L.D.; data curation, L.D.; writing—original draft preparation, Y.C.; writing—review and editing, Y.C.; visualization, L.D.; supervision, L.D.; project administration, L.D.; funding acquisition, L.D. All authors have read and agreed to the published version of the manuscript.

### **Funding**

This research was funded by the “Humanities and Social Science Project of Anhui Provincial Education Department, grant number SK2020A0066”.

### **Data Availability Statement**

There is no data in this study.

### **Conflicts of Interest**

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

### **Acknowledgement**

This research was funded by the Humanities and Social Science Project of Anhui Provincial Education Department (SK2020A0066).

### **References**

- [1] Choi, T.-M. (2021). Risk analysis in logistics systems: A research agenda during and after the COVID-19 pandemic. *Transportation Research Part E: Logistics and Transportation Review*, 145. <https://doi.org/10.1016/j.tre.2020.102190>
- [2] Tian, G. & Lu, W., Zhang, X., Zhan, M., Dulebenets, M. A., Aleksandrov, A., & Ivanov, M. (2023). A survey of multi-criteria decision-making techniques for green logistics and low-carbon transportation systems. *Environmental Science and Pollution Research*, 30(20), 57279-57301. <https://doi.org/10.1007/s11356-023-26577-2>
- [3] Li, L., Gong, Y., Wang, Z., & Liu, S. (2023). Big data and big disaster: a mechanism of supply chain risk management in global logistics industry. *International Journal of Operations & Production Management*, 43(2), 274-307. <https://doi.org/https://10.1108/ijopm-04-2022-0266>

- [4] Sergi, I., Montanaro, T., Benvenuto, F. L., & Patrono, L. (2021). A Smart and Secure Logistics System Based on IoT and Cloud Technologies. *Sensors*, 21(6). <https://doi.org/10.3390/s21062231>
- [5] Acheampong, T., & Kemp, A. G. (2022). Health, safety and environmental (HSE) regulation and outcomes in the offshore oil and gas industry: Performance review of trends in the United Kingdom Continental Shelf. *Safety Science*, 30, 57279–57301. <https://doi.org/https://10.1016/j.ssci.2021.105634>
- [6] Spyropoulos, N., Mousteri, V., Regan, L., O' Sullivan, M., Thompson, K., Juniper, B., & Davies, L. (2021). Developing a novel composite index for monitoring occupational health and wellbeing: A case study in the rail sector in Great Britain. *Safety Science*, 144. <https://doi.org/10.1016/j.ssci.2021.105446>
- [7] Phinias, R. N. (2023). Benefits and challenges relating to the implementation of health and safety leading indicators in the construction industry: A systematic review. *Safety Science*, 163. <https://doi.org/10.1016/j.ssci.2023.106131>
- [8] Liu, P., & Li, Y. (2021). An improved failure mode and effect analysis method for multi-criteria group decision-making in green logistics risk assessment. *Reliability Engineering & System Safety*, 215. <https://doi.org/10.1016/j.ress.2021.107826>
- [9] Singh, A., & Misra, S. C. (2021). Safety performance & evaluation framework in Indian construction industry. *Safety Science*, 134. <https://doi.org/10.1016/j.ssci.2020.105023>
- [10] Ortiz-Barrios, M., Silvera-Natera, E., Petrillo, A., Gul, M., & Yucesan, M. (2022). A multicriteria approach to integrating occupational safety & health performance and industry systems productivity in the context of aging workforce: A case study. *Safety Science*, 152. <https://doi.org/10.1016/j.ssci.2022.105764>
- [11] Frankish, E. J., Phan-Thien, K.-Y., Ross, T., McConchie, R., Luning, P. A., & Bozkurt, H. (2022). Performance assessment of food safety management systems in Australian apple packhouses in view of microbial control. *Food Control*, 133. <https://doi.org/10.1016/j.foodcont.2021.108642>
- [12] Golabchi, H., Abellanosa, A. D., Lefsrud, L., Pereira, E., & Mohamed, Y. (2024). A comprehensive systematic review of safety leading indicators in construction. *Safety Science*, 172. <https://doi.org/10.1016/j.ssci.2024.106433>
- [13] Yuan, S., Yang, M., Reniers, G., Chen, C., & Wu, J. (2022). Safety barriers in the chemical process industries: A state-of-the-art review on their classification, assessment, and management. *Safety Science*, 148. <https://doi.org/10.1016/j.ssci.2021.105647>
- [14] Hayes, J., Slotsvik, T. N., Macrae, C., & Gould, K. A. P. (2023). Tracking the right path: Safety performance indicators as boundary objects in air ambulance services. *Safety Science*, 163. <https://doi.org/10.1016/j.ssci.2023.106139>
- [15] Hammond, D. M., King, A. L., Joe, M., & Miller, J. R. (2023). Understanding the relationship between safety culture and safety performance indicators in U.S. nuclear waste cleanup operations. *Safety Science*, 166. <https://doi.org/10.1016/j.ssci.2023.106241>
- [16] Sangiorgio, V., Mangini, A. M., & Precchiazzi, I. (2020). A new index to evaluate the safety performance level of railway transportation systems. *Safety Science*, 131. <https://doi.org/10.1016/j.ssci.2020.104921>
- [17] Tonka, Ş. K., & Ekmekci, I. (2022). A Model Proposal for Occupational Health and Safety Performance Measurement in Geothermal Drilling Areas. *Sustainability*, 14(23). <https://doi.org/10.3390/su142315669>
- [18] Qi, H., Zhou, Z., Li, N., & Zhang, C. (2022). Construction safety performance evaluation based on data envelopment analysis (DEA) from a hybrid perspective of cross-sectional and longitudinal. *Safety Science*, 146. <https://doi.org/10.1016/j.ssci.2021.105532>
- [19] Jahanvand, B., Bagher Mortazavi, S., Asilian Mahabadi, H., & Ahmadi, O. (2023). Determining essential criteria for selection of risk assessment techniques in occupational health and safety: A hybrid framework of fuzzy Delphi method. *Safety Science*, 167. <https://doi.org/10.1016/j.ssci.2023.106253>
- [20] Fang, S., Zhou, P., Dinçer, H., & Yüksel, S. (2021). Assessment of safety management system on energy investment risk using house of quality based on hybrid stochastic interval-valued intuitionistic fuzzy decision-making approach. *Safety Science*, 141. <https://doi.org/10.1016/j.ssci.2021.105333>
- [21] Sadeghi, H., Zhang, X., & Mohandes, S. R. (2023). Developing an ensemble risk analysis framework for improving the safety of tower crane operations under coupled Fuzzy-based environment. *Safety Science*, 158. <https://doi.org/10.1016/j.ssci.2022.105957>
- [22] Chen, J., Liu, C., Meng, Y., & Zhong, M. (2021). Multi-Dimensional evacuation risk evaluation in standard

- subway station. *Safety Science*, 142. <https://doi.org/10.1016/j.ssci.2021.105392>
- [23] Riascos, C. E. M., Ensslin, S. R., & Merino, E. A. D. (2021). Development of performance indicators for Occupational Health and Safety: a constructivist multicriteria approach for PPE. *Production*, 31, <https://doi.org/10.1590/0103-6513.20200106>
- [24] Küçükarslan, A. B., Köksal, M., & Ekmekci, I. (2023). A Model Proposal for Measuring Performance in Occupational Health and Safety in Forest Fires. *Sustainability*, 15(20). <https://doi.org/10.3390/su152014729>
- [25] Tan, J., Liu, Y., Senapati, T., Garg, H., & Rong, Y. (2022). An extended MABAC method based on prospect theory with unknown weight information under Fermatean fuzzy environment for risk investment assessment in B&R. *Journal of Ambient Intelligence and Humanized Computing*, 14(10), 13067-13096. <https://doi.org/10.1007/s12652-022-03769-1>
- [26] Wang, W., Han, X., Ding, W., Wu, Q., Chen, X., & Deveci, M. (2023). A Fermatean fuzzy Fine-Kinney for occupational risk evaluation using extensible MARCOS with prospect theory. *Engineering Applications of Artificial Intelligence*, 117, 105518. <https://doi.org/https://DOI:10.1016/j.engappai.2022.105518>
- [27] Li, Y., Liu, P., & Wu, X. (2023). Failure mode and effect analysis approach considering risk attitude of dynamic reference point cumulative prospect theory in uncertainty contexts. *Artificial Intelligence Review*, 56(12), 14557-14604. <https://doi.org/10.1007/s10462-023-10501-8>
- [28] Yao, X., Guo, H.-X., Zhu, J., & Shi, Y. (2022). Dynamic selection of emergency plans of geological disaster based on case-based reasoning and prospect theory. *Natural Hazards*, 110(3), 2249-2275. <https://doi.org/10.1007/s11069-021-05036-6>
- [29] Amir-Heidari, P., Maknoon, R., Taheri, B., & Bazyari, M. (2017). A new framework for HSE performance measurement and monitoring. *Safety Science*, 100, 157-167. <https://doi.org/10.1016/j.ssci.2016.11.001>
- [30] Gao, D., Xie, W., Cao, R., Weng, J., & Ming Lee, E. W. (2023). The performance of cumulative prospect theory's functional forms in decision-making behavior during building evacuation. *International Journal of Disaster Risk Reduction*, 99, 104132. <https://doi.org/https://doi.org/10.1016/j.ijdrr.2023.104132>
- [31] Meng, F., Zhang, Q., & Cheng, H. (2013). Approaches to multiple-criteria group decision making based on interval-valued intuitionistic fuzzy Choquet integral with respect to the generalized  $\lambda$ -Shapley index. *Knowledge-Based Systems*, 37, 237-249. <https://doi.org/https://DOI:10.1016/j.knosys.2012.08.007>
- [32] Meng, F., Tan, C., & Zhang, Q. (2013). The induced generalized interval-valued intuitionistic fuzzy hybrid Shapley averaging operator and its application in decision making. *Knowledge-Based Systems*, 42, 9-19. <https://doi.org/https://DOI:10.1016/j.knosys.2012.12.006>
- [33] Wang, C., Chu, S., Ying, Y., Wang, A., Chen, R., Xu, H., & Zhu, B. (2023). Underfrequency Load Shedding Scheme for Islanded Microgrids Considering Objective and Subjective Weight of Loads. *IEEE Transactions on Smart Grid*, 14(2), 899-913. <https://doi.org/10.1109/TSG.2022.3203172>
- [34] Chang, K.-H. (2023). Integrating Subjective–Objective Weights Consideration and a Combined Compromise Solution Method for Handling Supplier Selection Issues. *Systems*, 11(2), 74. <https://www.mdpi.com/2079-8954/11/2/74>
- [35] Ben Rabia, M. A., & Bellabdaoui, A. (2023). Collaborative intuitionistic fuzzy-AHP to evaluate simulation-based analytics for freight transport. *Expert Systems with Applications*, 225, 120116. <https://doi.org/https://doi.org/10.1016/j.eswa.2023.120116>
- [36] Antão, P., Calderón, M., Puig, M., Michail, A., Wooldridge, C., & Darbra, R. M. (2016). Identification of Occupational Health, Safety, Security (OHSS) and Environmental Performance Indicators in port areas. *Safety Science*, 85, 266-275. <https://doi.org/https://doi.org/10.1016/j.ssci.2015.12.031>